
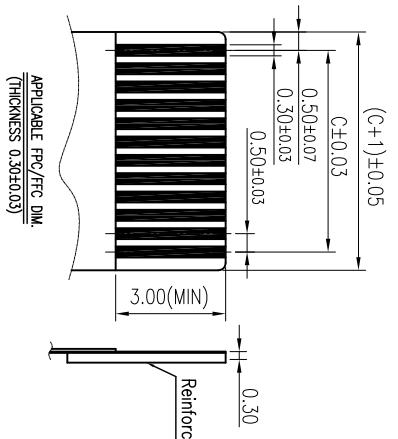


CABLE INSERT DIM.

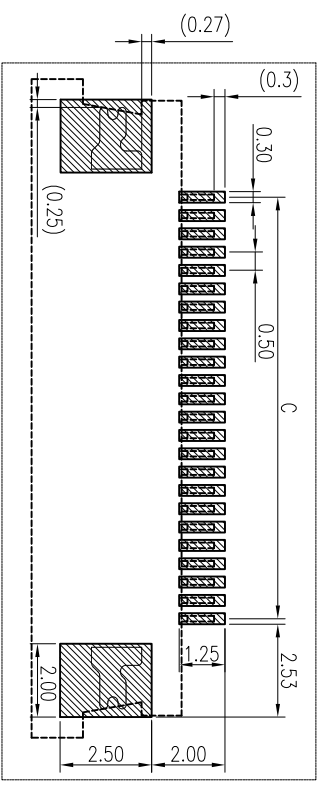

51	31.50	30.30	25.00	26.08
52	32.00	30.80	25.50	26.58
53	32.50	31.30	26.00	27.08
54	33.00	31.80	26.50	27.58
55	33.50	32.30	27.00	28.08
56	34.00	32.80	27.50	28.58
57	34.50	33.30	28.00	29.08
58	35.00	33.80	28.50	29.58
59	35.50	34.30	29.00	30.08
60	36.00	34.80	29.50	30.58

CUSTOMER DRAWING

一般公差
GENERAL TOLERANCE

±0.30
±0.20
±0.10



东莞市红都电子科技有限公司
DONG GUAN SHI HONG DU ELECTRONICS TECHNOLOGY CO., LTD

制图 (DWT): Kevin
审核 (APD):
料号 (PART NO.): FPC0512B-XX-00RS
品名 (TITLE): FPC 0.5Pitch 1.2H ZIF R/A 邦线板下接触连接器
比例 (SCALE): 5:1
张数 (SHEET): 1 Of 1
图幅 (SIZE): A4

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

NOTES:

- MATERIAL:
HOUSING: LCP UL 94V-0 COLOR: NATURE
ACTUATOR: LCP UL 94V-0 COLOR: BLACK
TERMINAL: PHOSPHOR BRONZE
LEG: BRASS
- PLATING:
TERMINAL: TIN OVER NICKEL
LEG: TIN OVER NICKEL
- PATING:
CURRENT RATING: 0.4A (AC/DC)
OPERATING VOLTAGE: 50V (AC/DC)
OPERATING TEMPERATURE: -55°C~85°C

